SIZE192C SMALL PUSH PULL SOLENOID

UNIT : mm (inch)
SHOWN ENERGIZED

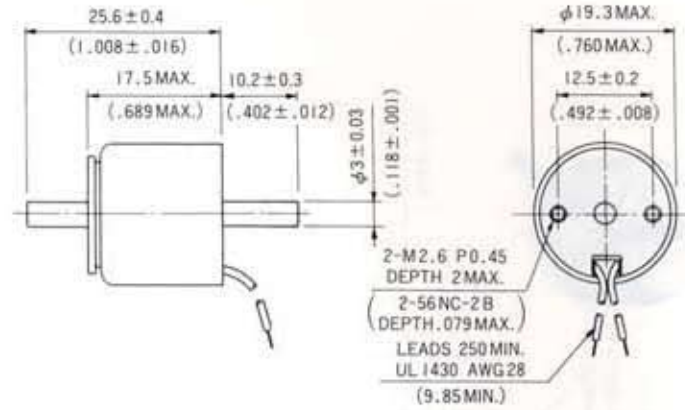

WEIGHT : 27g
PLUNGER : 4.5g

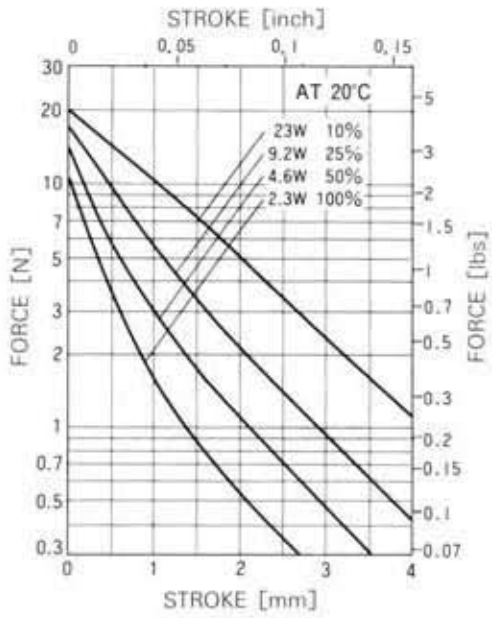

STROKE - FORCE

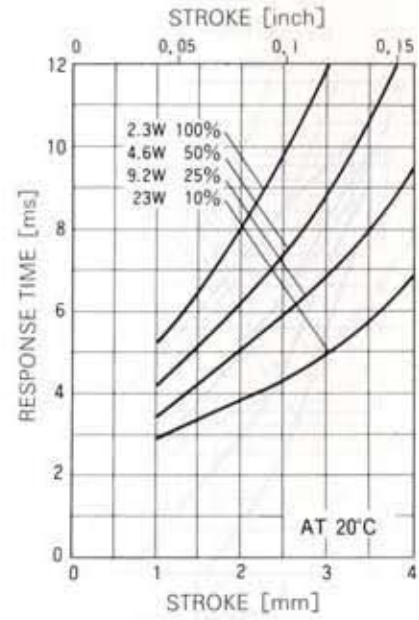

STROKE - RESPONSE TIME

COIL DATA

without heat sink

	duty cycle = "on" time / ("on" time + "off" time) ×100%		100% continuous	50% or less	25% or less	10% or less
	MAX. "on" time in seconds		∞	100	36	7
	watts at 20°C		2.3	4.6	9.2	23
	ampere-turns at 20°C		265	374	530	838
type no.	resistance Ω ±10% (at 20°C)	no. turns	volts DC			
M192C-3V F192C-3V	4.3	380	3	4.2	6	9.5
M192C-6V F192C-6V	16	735	6	8.5	12	19
M192C-12V F192C-12V	68	1500	12	17	24	38
M192C-24V F192C-24V	242	2770	24	34	48	76

1 - 800 - 543 - 6525

Shindengen America, Inc.